ADAPT GROUP LLC · FORT LAUDERDALE, FLORIDA

Adapt Group

FACTORY-DIRECT BUILDING MATERIALS

THE ADAPT LIBRARY — CATALOG

SPC Rigid-Core Flooring

Rigid-core SPC flooring — the factory program and color range behind our flooring quotes.

MANUFACTURER'S CATALOG FOLLOWS · 19 PAGES

FORT LAUDERDALE, FLORIDA

george@harmonysurface.com · adaptgroup.net

FROM THE ADAPT LIBRARY

About this collection

This book comes from the working library we source against every week. It is published by one of Adapt Group's partner factories, and it is reproduced here as part of our SPC Rigid-Core Flooring collection — the range behind the quotes we write.

Adapt is a materials company, not a showroom. We buy **factory-direct** from our manufacturing partners overseas and deliver to your job site in Florida with **shipping, tariffs, and customs included** in the landed quote — one number, no freight surprises after the fact.

Treat this catalog as a sample of the range, not the limit of it. The catalog shows only a portion of what Adapt can source — if a specification, finish, or product isn't in these pages, ask. **Nothing is not available.**

Specifications and pricing are confirmed per project: send us your plans or a takeoff and we will spec-match the products, price the full package landed, and confirm every detail in writing before anything ships.

SOURCING	Factory-direct, through Adapt's manufacturing partners
LANDED QUOTES	Shipping, tariffs, and customs included — one number
PRICING	Confirmed per project, from your plans or takeoff
DELIVERY	To your job site, anywhere in Florida

Adapt Group LLC

FORT LAUDERDALE, FLORIDA · GEORGE@HARMONYSURFACE.COM · ADAPTGROUP.NET

This catalog is published by an Adapt Group supply partner and reproduced for project reference. Product photography, drawings, and specifications are the manufacturer's; final specifications, quantities, and pricing are confirmed in writing with every quote. Adapt Group LLC is a materials supplier, not the manufacturer of the products shown.

NEW DESIGN

HARMONY
Surface USA By Superior Stone

SPC FLOORING

FLOOR was established in 2016, located in the beautiful China Sun City - Dezhou, Shandong. The company integrates production, research and development, sales and service into a professional production enterprise.

Equipped with the most advanced production equipment, imported slotting machine - HOMAG, UV Coating machine - JINGZHI.There're 7 production lines, capacity up to 600,000 SQM a month. Professional batching technicians, R&D engineers, production technicians, professional quality inspection departments, etc. to ensure product quality first. Currently CHONGNUO FLOOR become the largest SPC floor manufacturer in north of China. Europe, Southeast Asia, the Middle East, Australia and New Zealand are our main market. Good reputation in the field of SPC flooring.

Since its inception, the company has been adhering to the "people-oriented, quality, and development" philosophy, "practical, innovative, efficient, and development" corporate culture, provides benefits to society make happy to employees and satisfy customers.












1 MIXING MATERIAL

Pour the mixture according to the ratio → hot mixing in high-speed mixer (hot mixing temperature: 120℃--130℃, which can evenly mix all kinds of materials and expel water from the materials) → cold mixing (cool down the material to prevent clumping and discoloration, cold mixing temperature: 35℃--50℃)→ mix the materials evenly by cooling;



2 EXTRUTION

Add a twin-screw extruder to heat and extrudate → enter the sheet die head selected by the customer to extrudate the formed sheet. The formed sheet goes through a four-roller calender. The substrate thickness is determined → paste color film → paste wear-resistant layer → cool → cut

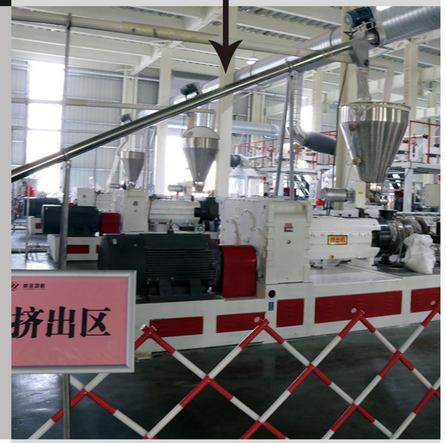



3 UV COATING

Uses antibacterial paint to effectively not only resists ultraviolet rays but also bacteria. Twice UV to protect the surface of plank, no scratch, no fade.

4 SLOTTING

Professional imported slotting machine produce specific groove, locked tightly



5 PACKING

Export box packing with pallet, wrapped with film and belted Protect goods from damages on the sea


HARMONY
Surface USA By Superior Stone

Spc Flooring

PRODUCT STRUCTURE

SPECIFICATIONS

	DETAILS
Size	1220 x 183mm , 1524 x 228mm , 610 x 305mm , 640 x128mm herringbone , customized
Thickness	3.5mm , 4.0mm , 4.5mm , 5.0mm , 5.5mm , 6.0mm , 6.5mm , 7.0mm
Wear Layer	0.1-1.0mm , customized
Color Pattern	Wood Pattern, Stone Pattern, Carpet Pattern
Material	100% virgin PVC and Calcium Carbonate
Layer	UV Coating, Wear Layer, Decor Film, SPC Rigid Core, Back Foam
Density	2.1g/cm^3

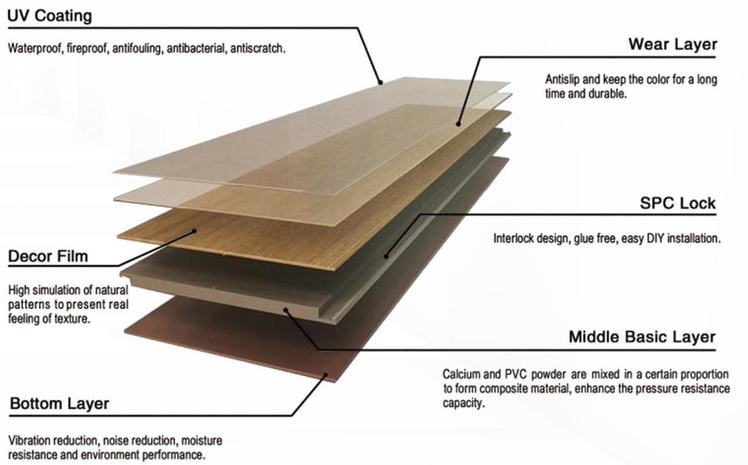



SPC FLOORING

HARMONY
Surface USA By Superior Stone

SIX ADVANTAGES



ANTI-SCRATCH



ANTISLIP &COMFORTABLE



ECO-FRIENDLY & SAFETY



EASY TO INSTALL & SUPPORT DIY



WATERPROOF &MOISTURE PROOF



FIREPROOF & FLAME RETARDANT



HARMONY
Surface USA By Superior Stone




XLW-2878


XLW-2879


XLW-2881


XLW-2882


XLW-2883


XLW-2885


XLW-2886


XLW-2887


XLW-2891





HARMONY
Surface USA By Superior Stone

Spc Flooring

New decorative material




HARMONY
Surface USA By Superior Stone



XLW-2835


XLW-2836


XLW-2837

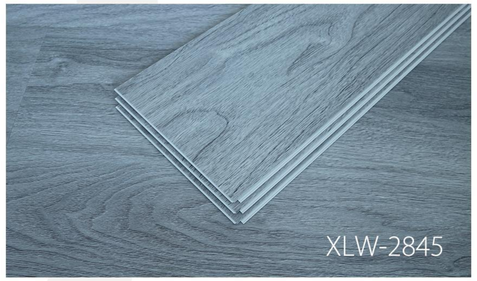
XLW-2845


XLW-2861

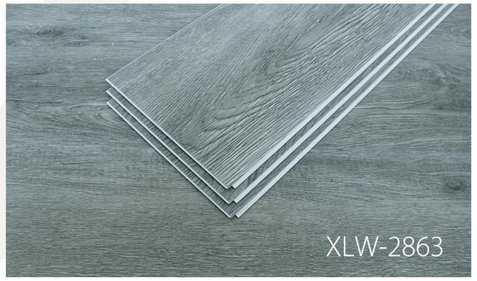
XLW-2863





New Design

New decorative material




HARMONY
Surface USA By Superior Stone


XLW-2865


XLW-2867


XLW-2868


XLW-2869

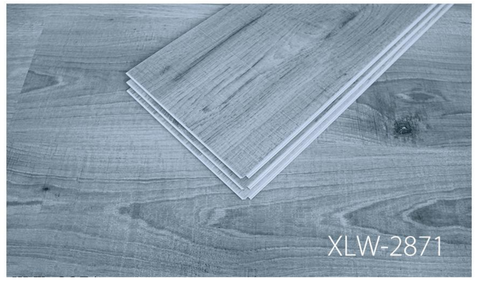
XLW-2871


XLW-2872






XLW-2839


XLW-2863



XLW-2864


XLW-2876


XLW-2877


XLW-2885

HARMONY
Surface USA By Superior Stone

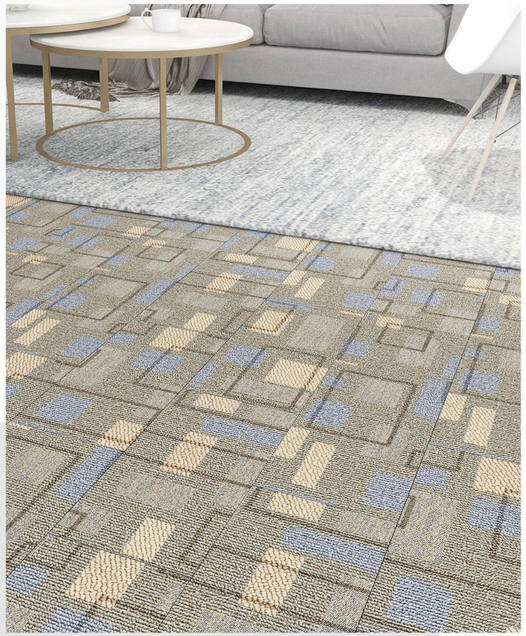

Stone Design


New decorative material

SPC FLOORING






XLW-6629

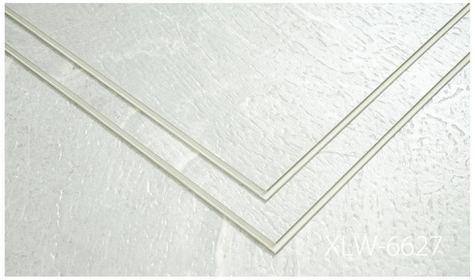
XLW-6627


XLW-6628


XLW-6626


XLW-8521


XLW-8520

HARMONY
Surface USA By Superior Stone

SKIRTING LINE

Skirting line to be designed in the bedroom, line of Yin horn line, waist, develop crural line to have visual balance effect, the linear sense that USES them and material qualitative, colour are waited in indoor mutual echo, can have better beautification adornment effect.

Another function of the Skirting line is protection.Skirting line, as its name implies is the foot of the wall area, so it is easier to be affected.



NAME	T-MOULDING
Size	2400*45*6mm
Packing	25pcs/ctn
Weight	13.8kg/ctn




NAME	QUARTER ROUND
Size	2400*28*15mm
Packing	25pcs/ctn
Weight	12.0kg/ctn



NAME	REDUCER A
Size	2400*45*8mm
Packing	25pcs/ctn
Weight	16.8kg/ctn



NAME	END CAP
Size	2400*35*8mm
Packing	25pcs/ctn
Weight	13.2kg/ctn



NAME	SLIRTING 60
Size	2400*60*12mm
Packing	10pcs/ctn
Weight	8.9kg/ctn



NAME	SKIRTING 80-1
Size	2400*80*15mm
Packing	10pcs/ctn
Weight	11.2kg/ctn



NAME	STAIR NOSE A
Size	2400*55*18mm
Packing	10pcs/ctn
Weight	10.5kg/ctn



NAME	STAIR NOSE B
Size	2400*72*25mm
Packing	10pcs/ctn
Weight	21.4kg/ctn



NAME	WPC SKIRTING 90
Size	2400*80*12mm
Packing	10pcs/ctn
Weight	11.8kg/ctn




WPC WALL PANEL

New decorative material

HARMONY
Surface USA By Superior Stone



CNWPC-16024





CNWPC-15923













HARMONY
Surface USA By Superior Stone

Certificates

reliable partner

SCS Global Services does hereby certify that an independent assessment has been conducted on behalf of:

Chongnuo (Shandong) New Material Co., Ltd.

Northwest of the crossroad of Dongyue Street and Kunlun East Road, Economic Development Zone, Qingyun County, Dezhou, Shandong, China

For the following product(s):

Vinyl Tile:

Stone Plastic Composite Flooring *(Maximum thickness: 6.5mm)*
Stone Plastic Composite Flooring with pad *(Maximum thickness: 8.0mm)*

The product(s) meet(s) all of the necessary qualifications to be certified for the following claim(s):

FloorScore®

Indoor Air quality Certified to SCS-EC10.3-2014 v4.1
Conforms to the CDPH/EHLB Standard Method v1.2-2017 (California Section 01350), effective April 1, 2017, for the school classroom and private office parameters when modeled as Flooring.

Measured Concentration of Total Volatile Organic Compounds (TVOC): Less than/equal to 0.5 mg/m^3 (in compliance with CDPH/EHLB Standard Method v1.2-2017)

Registration # SCS-FS-08057
Valid from: July 14, 2022 to July 31, 2023

SCS Global Services is currently the only certification body approved by the Resilient Floor Covering Institute (RFCI) to provide FloorScore® product certification; certified products are only listed on the SCS Green Products Guide, http://www.scsglobalservices.com/certified-green-products-guide.

Stanley Mathuram, PE, Executive Vice President
SCS Global Services
2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA

HARMONY
Surface USA By Superior Stone

floor score
CERTIFIED BY SCS Global Services

CE intertek
Total Quality. Assured.

EPH®
SUCCESS BY QUALITY
Entwicklungs- und Prüflabor Holztechnologie GmbH
Zellescher Weg 24 · 01217 Dresden · Germany
www.eph-dresden.de

ilac-MRA DAkkS Deutsche Akkreditierungsstelle D-PL-11054-01-00
accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS)

Deutschen Institut für Bautechnik DIBt
European Notified Body for construction products 0766
Recognized body of DIBt SAC03

CE TEST CERTIFICATE

FOR PERFORMANCE CHARACTERISTICS OF CONSTRUCTION PRODUCTS FOR THE CE MARKING

FLO-22-05-13-02

Products: SPC Flooring, Top layer: PVC + colour film layer, UV coating, Structure: "BP"
Thicknesses: 3,5 mm - 6,5 mm

Client: › (Shandong) New Material Co., Ltd.
Northwest of the crossroad of Dongyue Street and Kunlun East Road
Economic Development Zone, Qingyun County, Dezhou City, Shandong Province
CHINA

Order: Testing and classification of selected properties according to
EN 14041:2004+AC:2005+AC:2006 (CE-labelling)

Test report: 2708003/237

Test results: The above mentioned SPC Flooring can be classified regarding to the tested both properties according to EN 14041:2004+AC:2005+AC:2006 (CE-labelling) as follows:

Properties	Results	Declaration according to EN 14041:2004+AC:2005+AC:2006
Reaction to fire performance according to EN ISO 9239-1:2010-06 and EN ISO 11925-2:2020-03, Classification according to EN 13501-1:2018-12		
- Critical heat flux - Smoke production	11,0 kW / m² 539 % x min	Reaction to fire class* B_{fl}-s1
Sliding behavior according to EN 13893:2002-11	μ = 0,41	class DS
Formaldehyde emission according to EN 717-1:2004-10	< LOD (336 h)	class E1

* Valid on wooden or mineral subfloor in end use application, using adhesives or not.
LOD = Limit of Detection

Dresden, 13/05/2022

Entwicklungs- und Prueflabor Holztechnologie GmbH EPH QUALITY TESTED

R. Emmler
Head of laboratory

i.V. Meuel
Engineer in charge

intertek
Total Quality. Assured.

Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch
Plant 5, No. 6958 Daye Road, Fengxian District, Shanghai, China
Tel: 021-61136116 Fax: 021-61189921
Website: www.intertek.com

Test Report

Issue Date: 2021-06-02 Intertek Report No. 210517008SHF-001
Applicant: ›(Shandong) New Material Co., LTD
Address: Northwest of the crossroad of Dongyue Street and Kunlun East Road, Economic Development Zone, Qingyun County, Dezhou City, Shandong Province
Attn: Lingling Xu
Test Type: Performance test, samples provided by the applicant.

Product Information

Product Name	vinyl (spc lvt) flooring	Brand	/
Sample Description	Good Condition	Sample Amount	25 pcs
		Received Date	2021-05-17
Sample ID	Model	Specification	
S210517008SHF.001	/	1220x183x4mm	

Test Methods And Standards

Test Standard	EN ISO 23999:2018/ISO 23999:2018
Specification Standard	/
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.

Note:
1.This report relates specifically to the sample(s) that were drawn and provided by the applicant or their nominated third party. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and/or shipment and only relate to the sample(s) as received and tested.

Report Authorized

INTERTEK TESTING SERVICES SHENZHEN LTD. SHANGHAI FENGXIAN BRANCH

Name: Daniel Zhang Title: Approver
Name: Sally Xie Title: Reviewer
Name: Lillian Zhang Title: Project Engineer

intertek
Total Quality. Assured.

Test Report

Issue Date: 2021-06-02 Intertek Report No. 210517008SHF-001

Test Items, Method and Results:

Test Item: Dimensional stability and curling
Test Method: EN ISO 23999:2018/ISO 23999:2018
Conditioning:
Temperature: 23 °C
Humidity: 50 %
Duration: 24 h
Measure the initial length and curling
Test Condition:
Temperature: 80 °C
Duration: 6 h
Reconditioning:
Temperature: 23 °C
Humidity: 50 %
Duration: 24 h
Measure the final length and curling


Test Result:

Specimen	Dimensional stability (%)		Curling (mm)
	Length direction/Machine direction	Width direction/Across machine direction	
1	-0.01	0.01	0.02
2	-0.02	0.02	0.07
3	-0.01	0.00	0.06
Average	0.00	0.00	0.0
Max.	-0.02	0.02	0.07


Note:
1. Dimensional stability = (initial length - final length)×100/initial length
Express the average value to the nearest 0.05%
A negative value indicates expansion, and a positive value indicates shrinkage .
2. Curling = final curling - initial curling
Express the average value to the nearest 0.5mm

The Installation


reliable partner

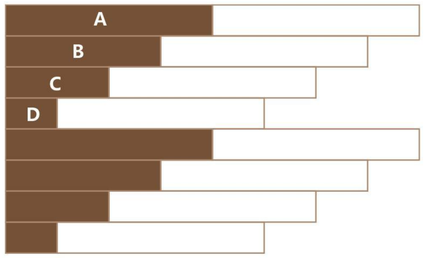


The proportion like:
A=1220mm; B=915mm; C=610mm; D=305mm

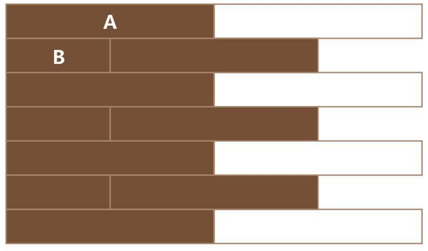

The proportion like:
A=1220mm; B=610mm

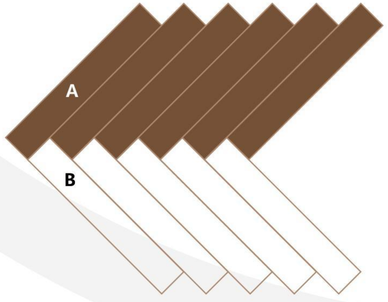

The proportion like:
A=640mm; B=640mm

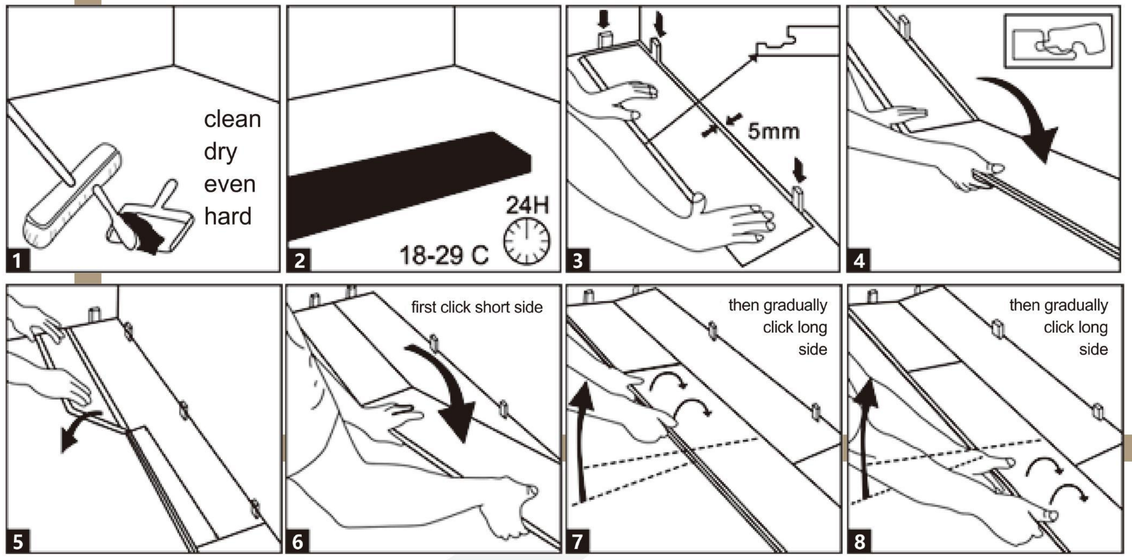

Packing and Shipping

professional partner










HARMONY
Surface USA By Superior Stone
FLOOR, ENJOY YOUR LIFE